

CAN 2.0B Unit for USB
CAN-2-USB



* Specifications, color and design of the products are subject to change without notice.

Features

CAN communication function

This product can expand the 2-channel CAN communication function to a PC.

This product is compliant with CAN2.0B communication, supporting communication speeds of up to 1Mbps.

Each channel is controlled by an individual CAN controller, allowing each channel to communicate independently of the status of other channels.

Compatible to USB2.0/USB1.1 and bus power-driven eliminating the need for external power

Compatible to USB2.0/USB1.1 and capable to achieve high speed transfer at HighSpeed (480 Mbps).

The product is driven by bus power from USB, which eliminates the need for external power.

Includes a separate send/receive buffer for each channel

A separate 16 message FIFO buffer for sending and receiving is provided at each channel.

Capable of adapting a wide-range power (10 - 32VDC)

The product is capable of dealing with a wide range of power in the differing environments.

Power connector also has a FG terminal.

Terminating Resistor Function within

The terminating resistor of each channel can be enabled/disabled using the DIP switch on the unit.

Provide device drivers compatible with Windows

Windows applications can be created by using the device driver API-TOOL provided on our website.

Packing List

- Product [CAN-2-USB] ... 1
- Power Connector ... 1
- USB Cable [Type-A → Type-C, 1.8m] ... 1
- Please read the following ... 1

Optional Products

Product Name	Model type	Description
AC adapter	POA201-10-2	12VDC, 1.0A *1

*1 The operating ambient temperature is 0 to 40 °C.

* Information about the option products, see the Contec's website.

This product is a CAN/USB converter unit that connects to a PC USB port and expands the CAN communication function.

This product is compliant with CAN2.0B communication, supporting communication speeds of up to 1Mbps.

It includes a USB Type-C port and can operate using the bus power from the host.

Windows driver is supported with this product.

- * The contents in this document are subject to change without notice.
- * Visit the CONTEC website to check the latest details in the document.
- * The information in the data sheets is as of May, 2024.

Specifications

Function specification

Item	Description
CAN	
Communication method	CAN2.0B
Communication speed	1Mbps (Max)
Number of channels	2
CAN transceiver	TCAN1042 (T.I) or equivalent (ISO11898-2 (2016) compliant)
Transmission buffer	16 messages/ch
Reception buffer	16 messages/ch
Terminating resistor	120Ω (Each channel can be disconnected individually using the unit DIP switches)
Connector	9pin D-SUB connector [male]
USB	
Bus specification	USB Specification 2.0/1.1 standard
USB transfer rate	12Mbps (Full-speed), 480Mbps (High-speed) *1
Cable length	1.8m
Power supply	Bus power/Self power *2
Connector	Type-C USB connector
Power supply	
Rated input voltage	10 - 32VDC
Power consumption	Bus power : 5VDC 330mA (Max) Self power : 10VDC 170mA (Max), 32VDC 60mA (Max)
Connector	European type terminal 3.5mm pitch 3pin jack connector 9pin D-SUB connector [male]
Common	
Physical dimensions (mm)	100(W) x 80(D) x 30(H) (No projection included)
Weight	150g (Not including the USB cable, attachment)
Software	
Supported software	API-J2534(WDM) *3, API-CAN(WDM) *4
Supported protocols	RawCAN, ISO-TP(ISO15765-2) *5

*1 USB transfer rate is depend on the environment of the host PC (OS, USB host controller) being used.

*2 Can operate with both bus power and self-power supply.

*3 Compliant with SAE J2534 version 04.04 (Pass-Thru)

*4 Available soon

*5 Supported only by API-J2534(WDM)

Installation Environment Requirements

Item	Description
Operating ambient temperature	-20 - +60°C airflow 0.7m/s *1 -20 - +55°C without air flow *1
Storage Temperature	-20 - +60°C
Operating ambient humidity	10 - 90%RH (No condensation)
Floating dust particles	Not to be excessive
Corrosive gases	None
Line-noise Resistance	Line noise AC Line/±2kV (IEC61000-4-4 Level 3, EN61000-4-4 Level 3) Signal Line/±1kV (IEC61000-4-4 Level 3, EN61000-4-4 Level 3)
	Static electricity resistance Touch/±4kV (IEC61000-4-2 Level 2, EN61000-4-2 Level 2) Air/±8kV (IEC61000-4-2 Level 3, EN61000-4-2 Level 3)
Vibration resistance	Sweep resistance 10 - 57Hz /semi-amplitude vibration 0.15mm, 57 - 150Hz/2.0G 40minutes each in X, Y, and Z directions (JIS C60068-2-6-compliant, IEC60068-2-6-compliant)
Shock resistance	147m/s ² (15G) half-sine shock for 11ms (JIS C60068-2-27-compliant, IEC60068-2-27-compliant)
Standard	VCCI Class A, FCC Class A, CE Marking (EMC Directive Class A, RoHS Directive), UKCA, ISED, RCM, KC


*1 When using the separately sold AC adapter POA201-10-2, this is 0 - +40°C.

Support Software


Name	Contents	How to get
Windows Version Driver software for CAN SAE J2534 API-J2534(WDM)	The Windows device driver is provided as a form of Windows API functions. It supports CAN communication which conforms to J2534-1 REV. DEC2004 (Pass-Thru) established by SAE.	Download from the CONTEC website
Windows Version CAN Communication Driver software API-CAN(WDM) *1	The Windows device driver is provided as a form of Windows API functions. Various sample programs such as C# and Visual Basic .NET. The software includes various sample programs such as C#, Visual Basic .NET, Visual C++, and Python.	Download from the CONTEC website

*1 Available soon.

Physical Dimensions

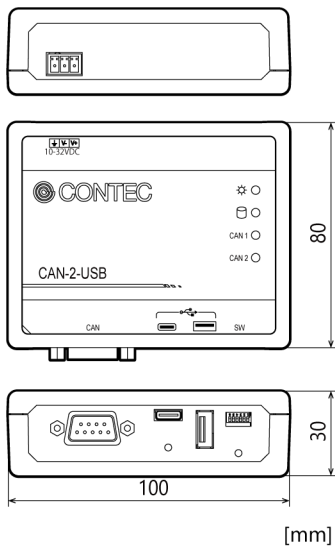

Component Name

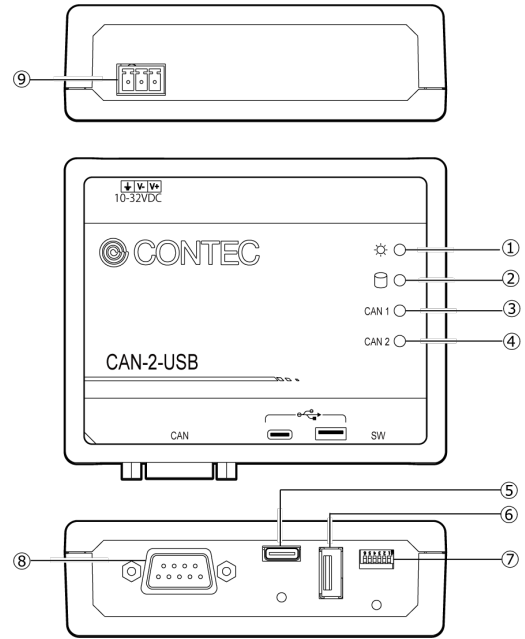

No.	Name	No.	Name
1	POWER LED	6	USB Port [Type-A] * Not used
2	STATUS LED	7	DIP Switch
3	CAN 1ch LED	8	CAN Port (Male)
4	CAN 2ch LED	9	Power Connector
5	USB Port [Type-C]		